


WHITE BODY


PORCELAIN TILES

600X600 mm

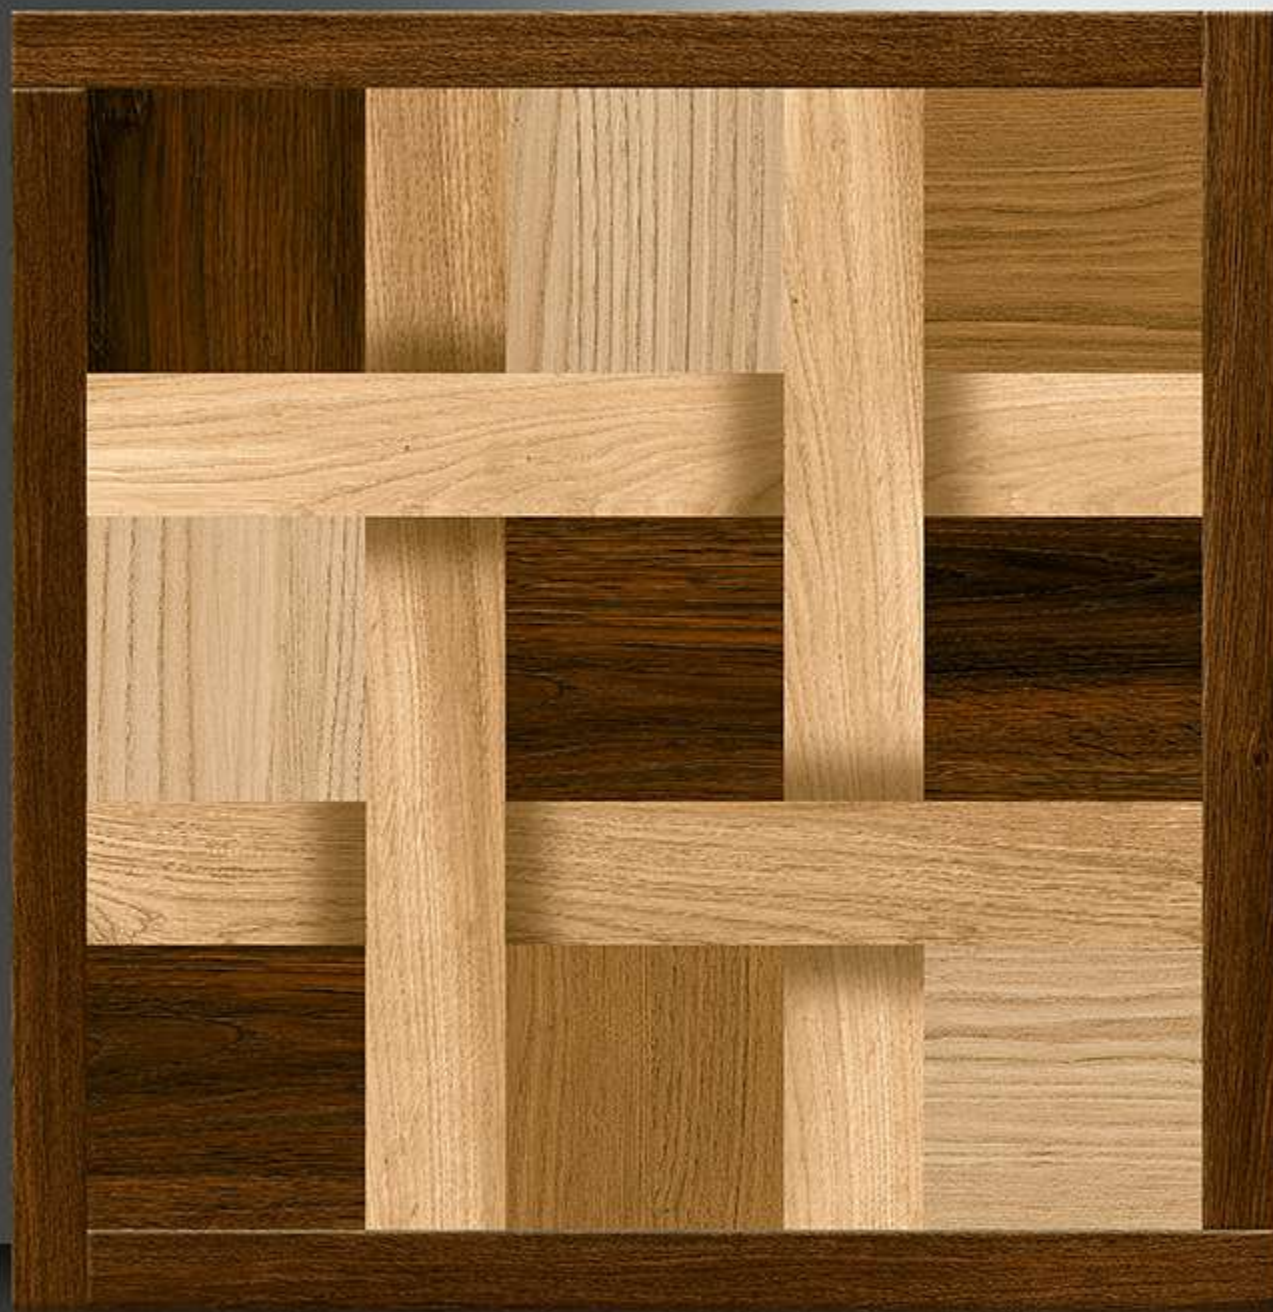

1201

GALICHA SERIES

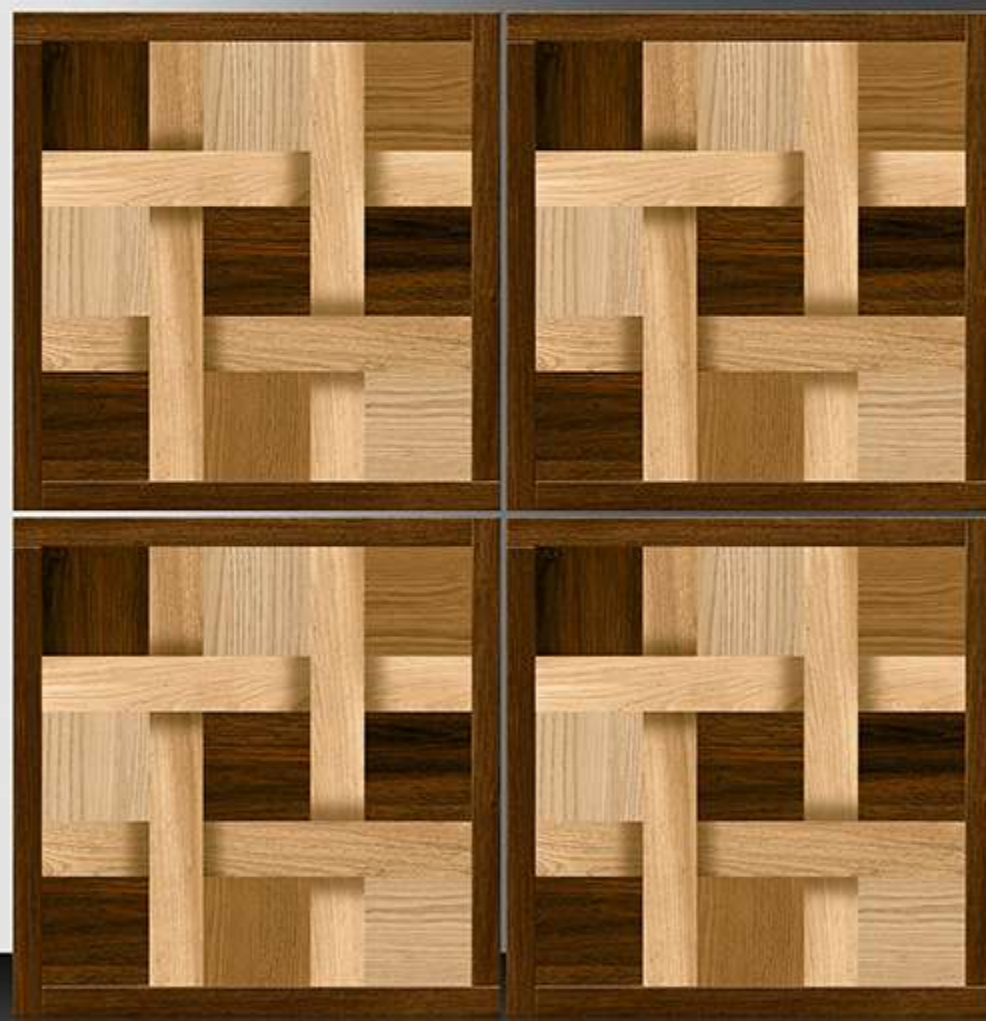

WHITE BODY


PORCELAIN TILES

600X600 mm



1202


GALICHA SERIES

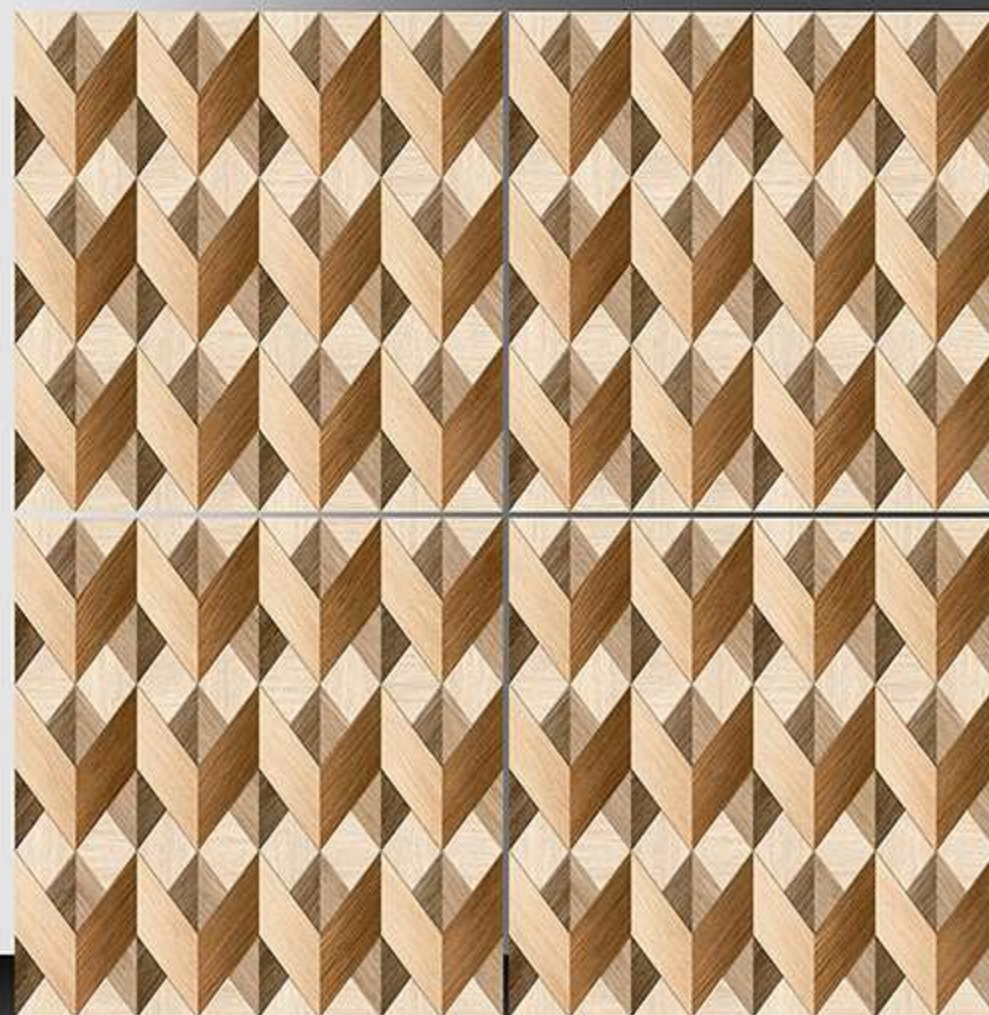

WHITE BODY

PORCELAIN TILES

600X600 mm

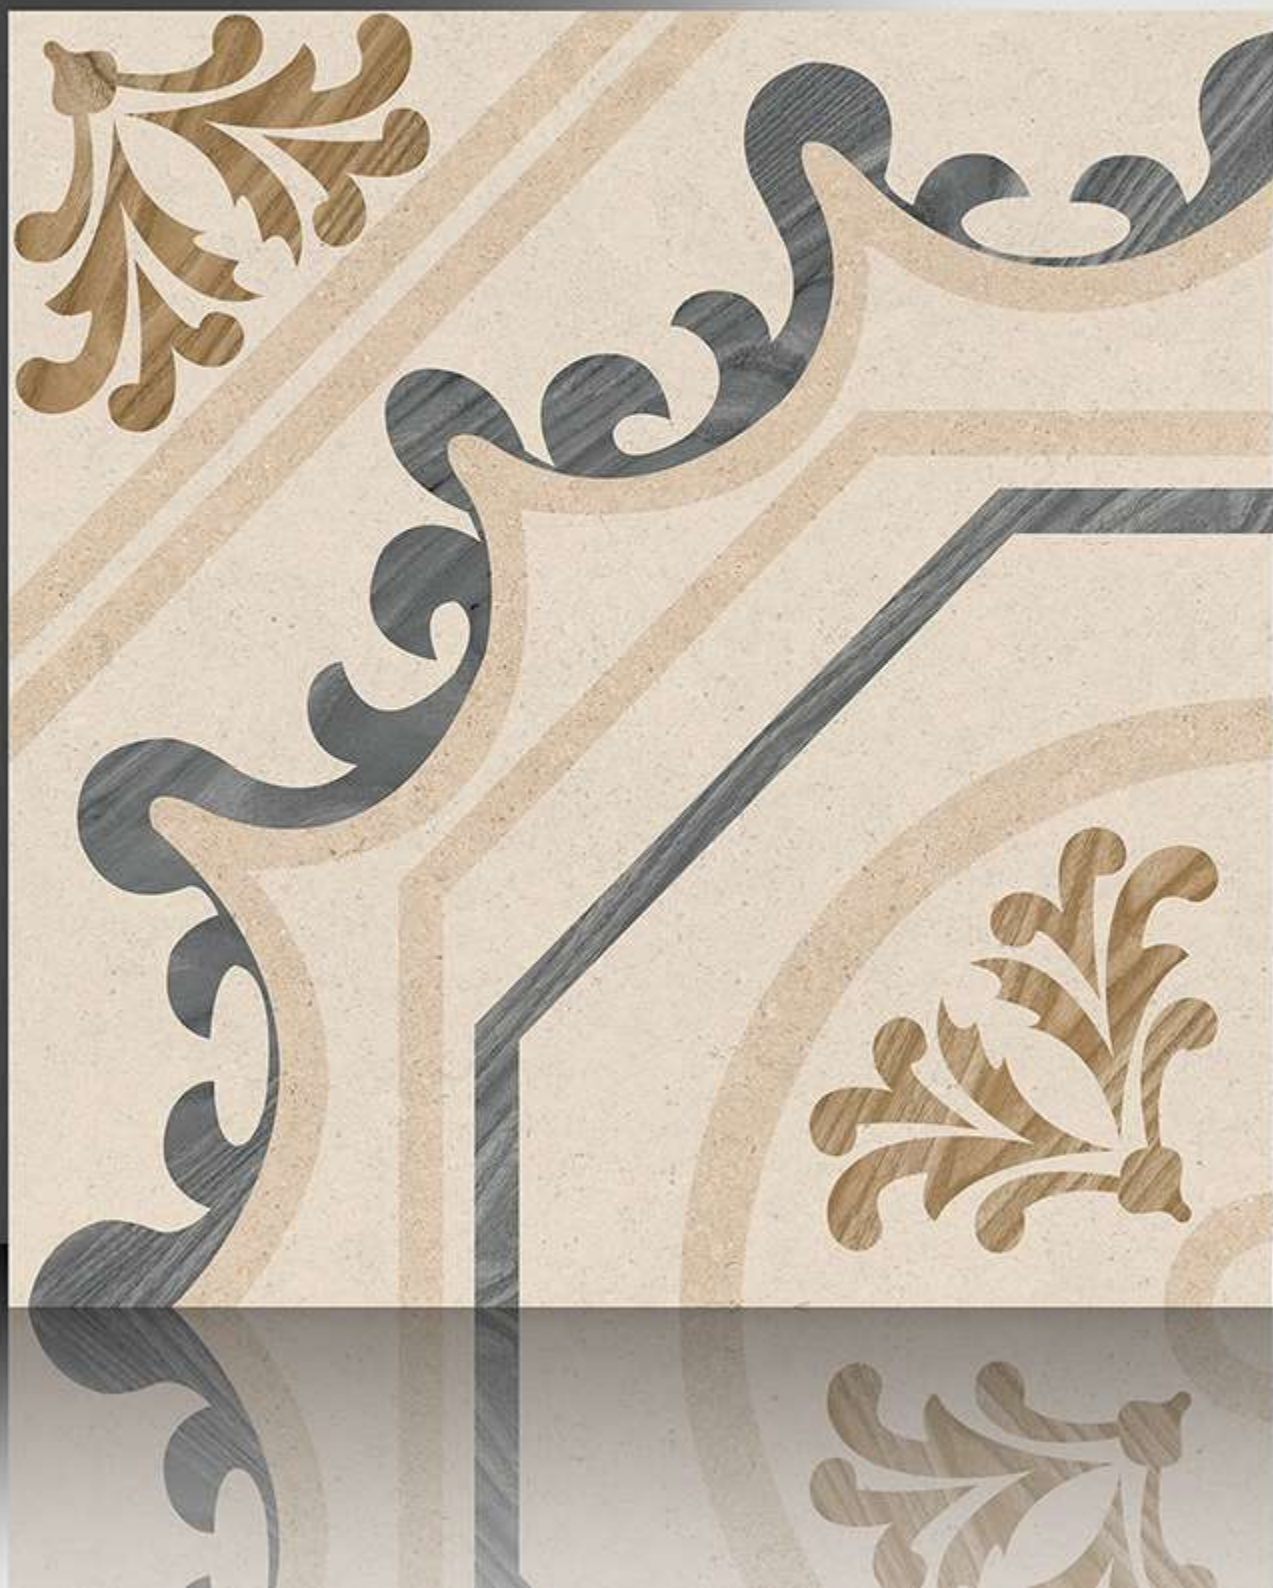

1203

GALICHA SERIES



WHITE BODY


PORCELAIN TILES

600X600 mm



1204


GALICHA SERIES

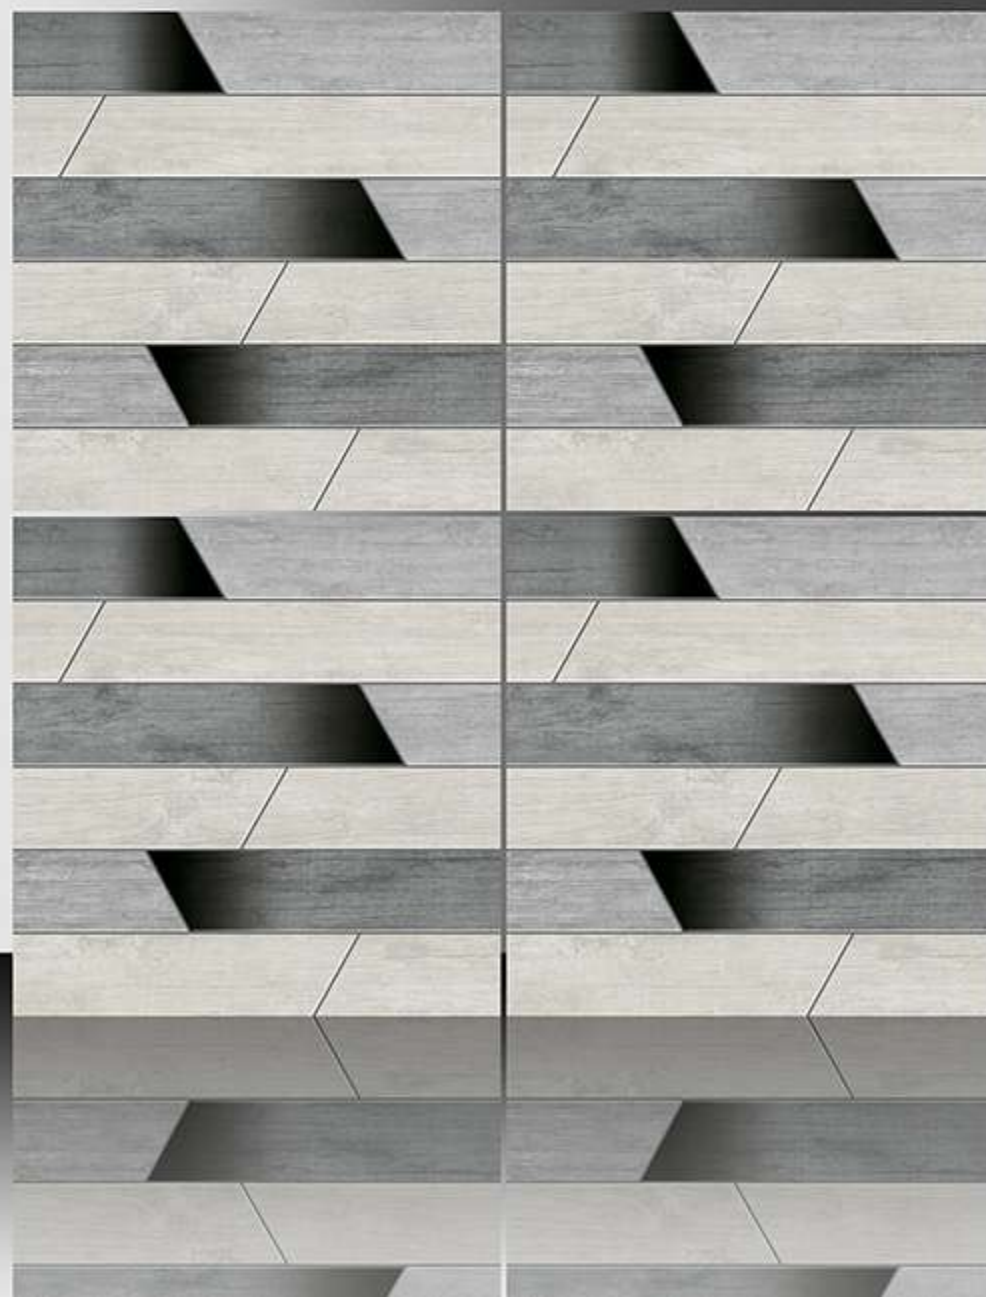

WHITE BODY


PORCELAIN TILES

600X600 mm

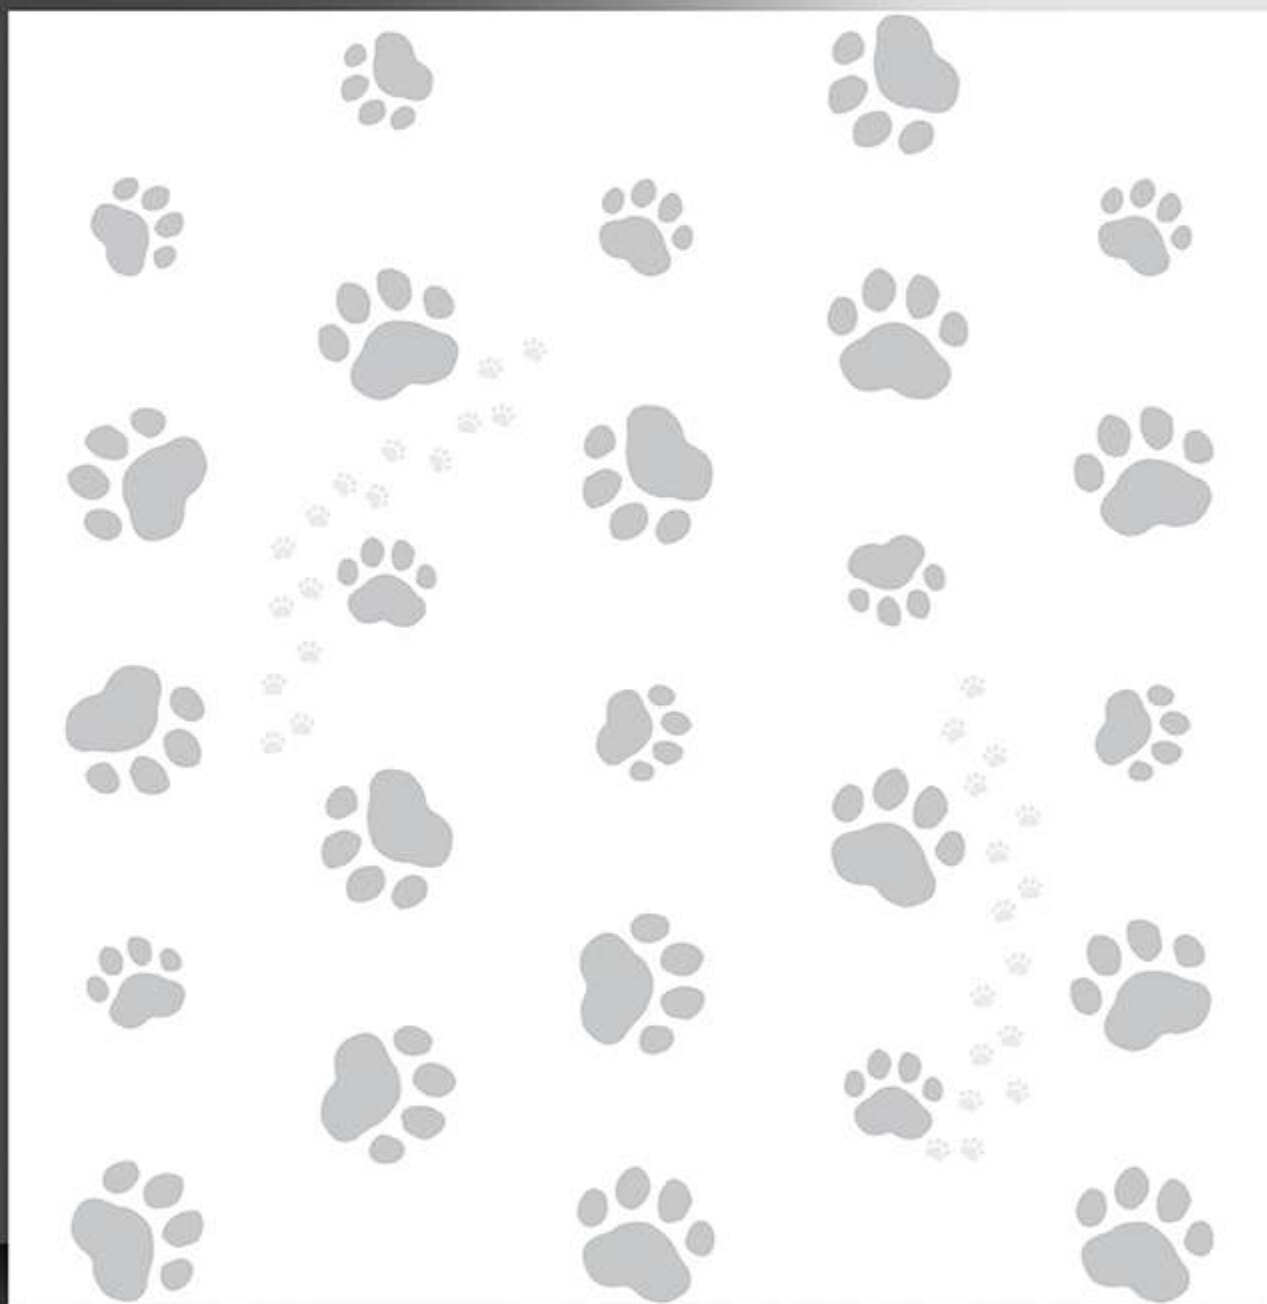

1205


GALICHA SERIES

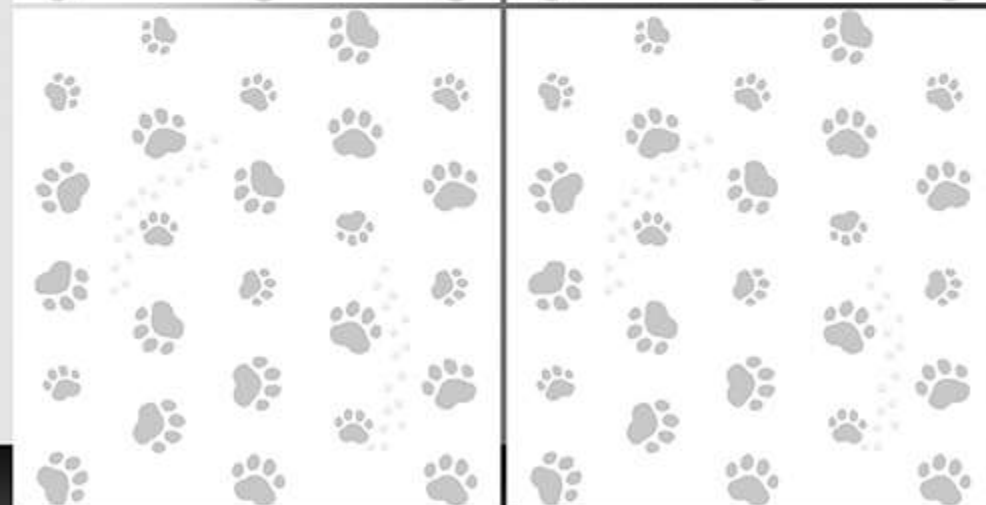

WHITE BODY

PORCELAIN TILES

600X600 mm

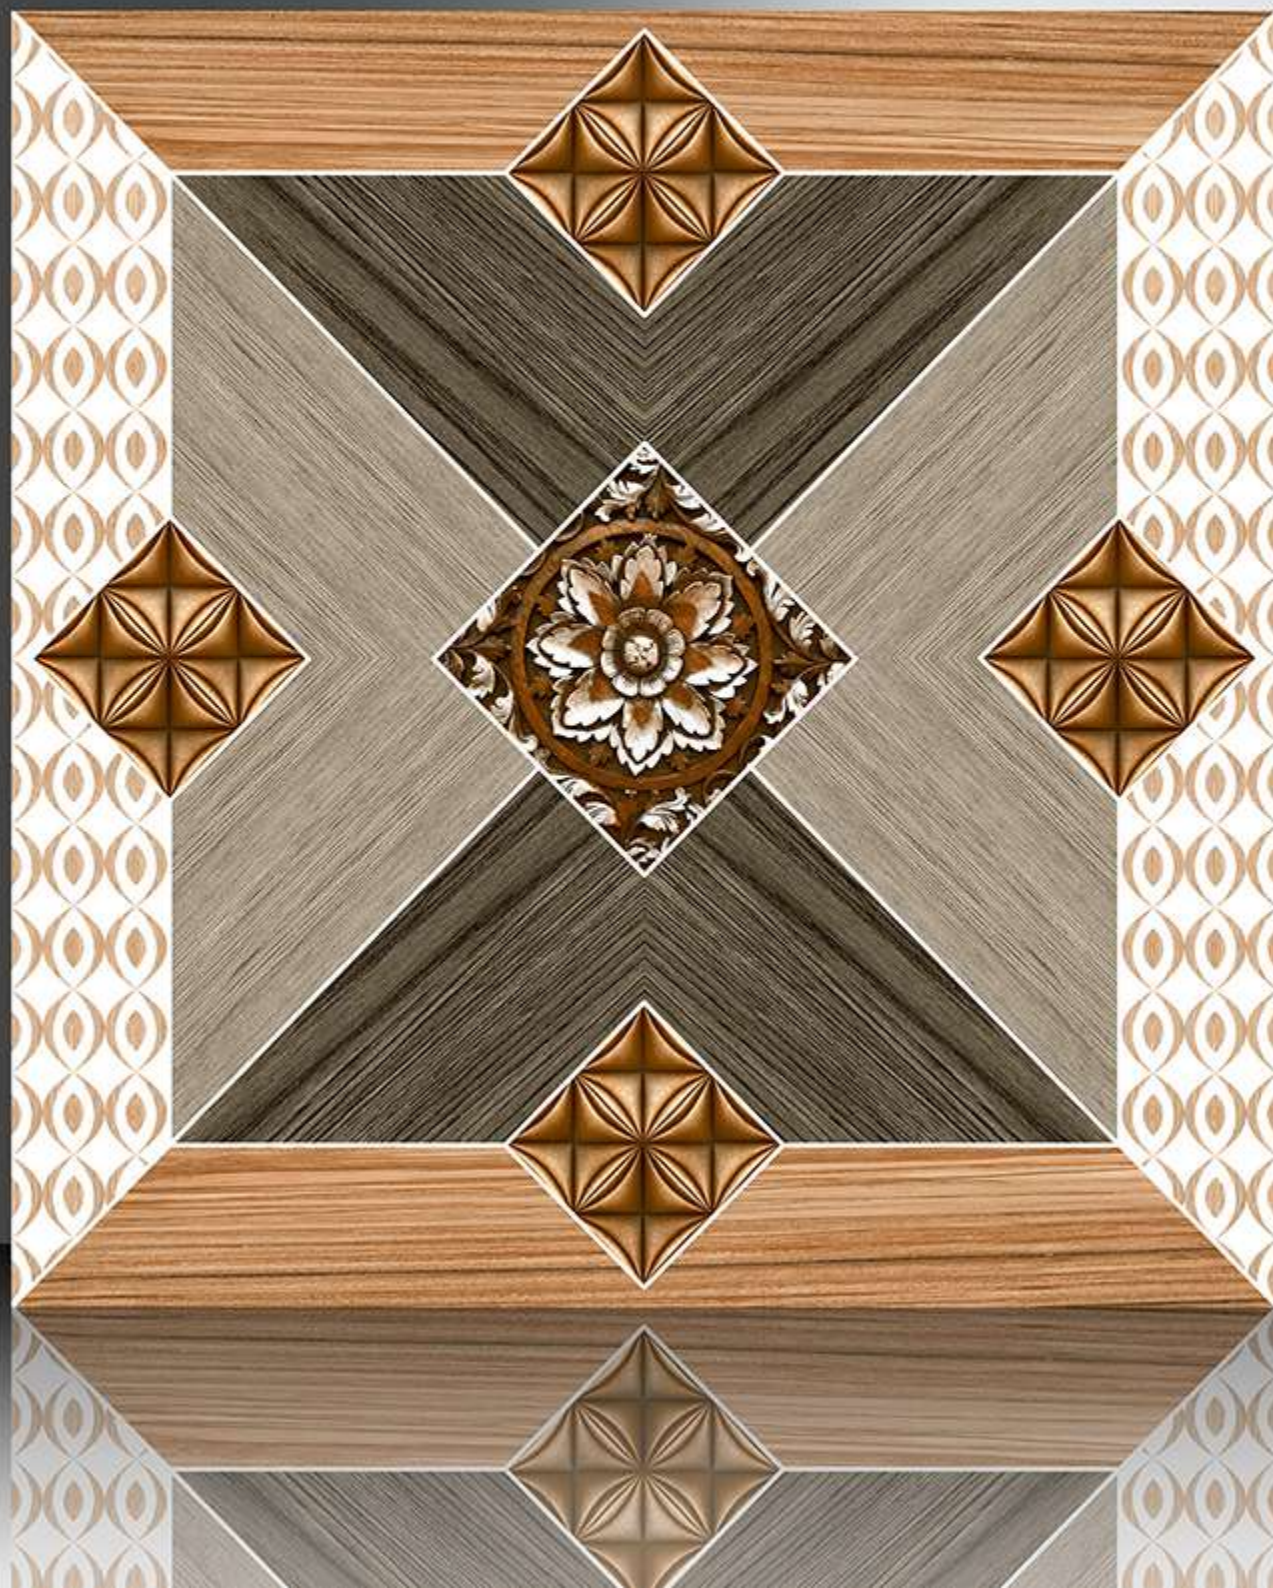

1206


GALICHA SERIES



WHITE BODY


PORCELAIN TILES

600X600 mm

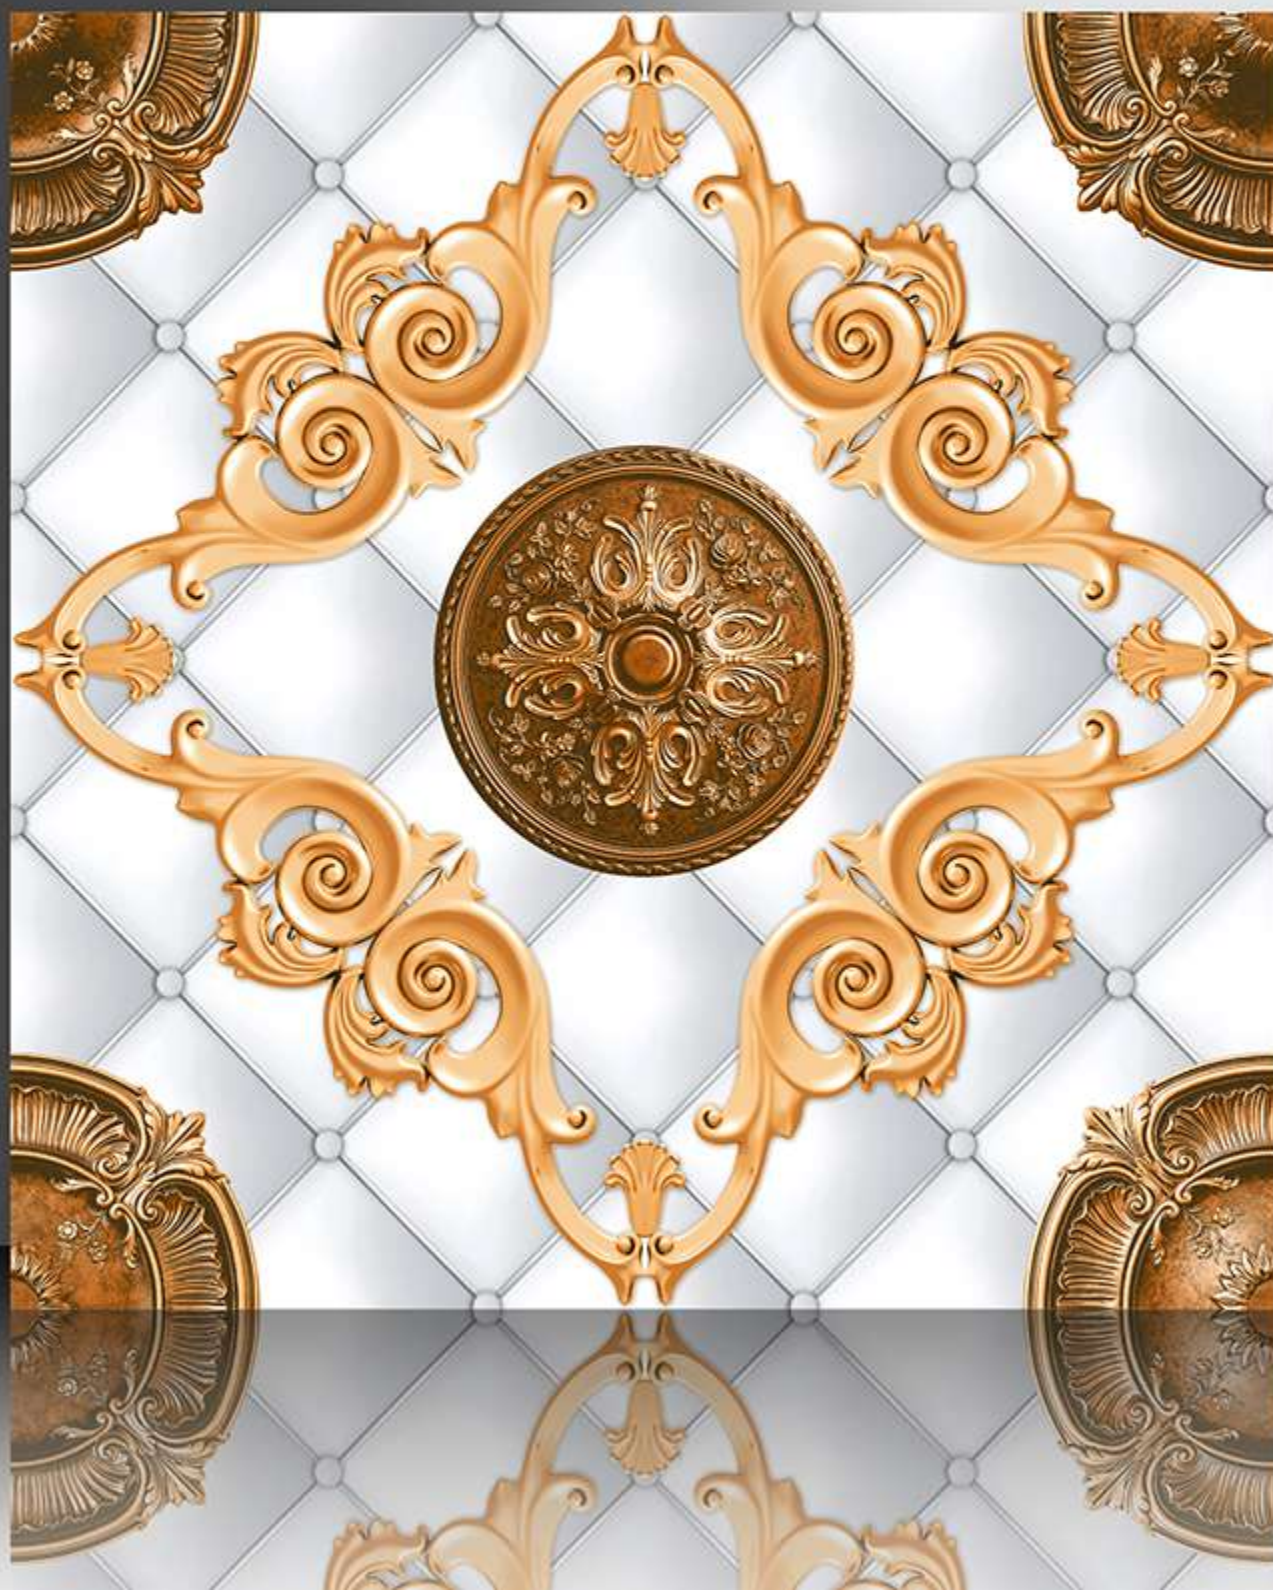

1207

GALICHA SERIES

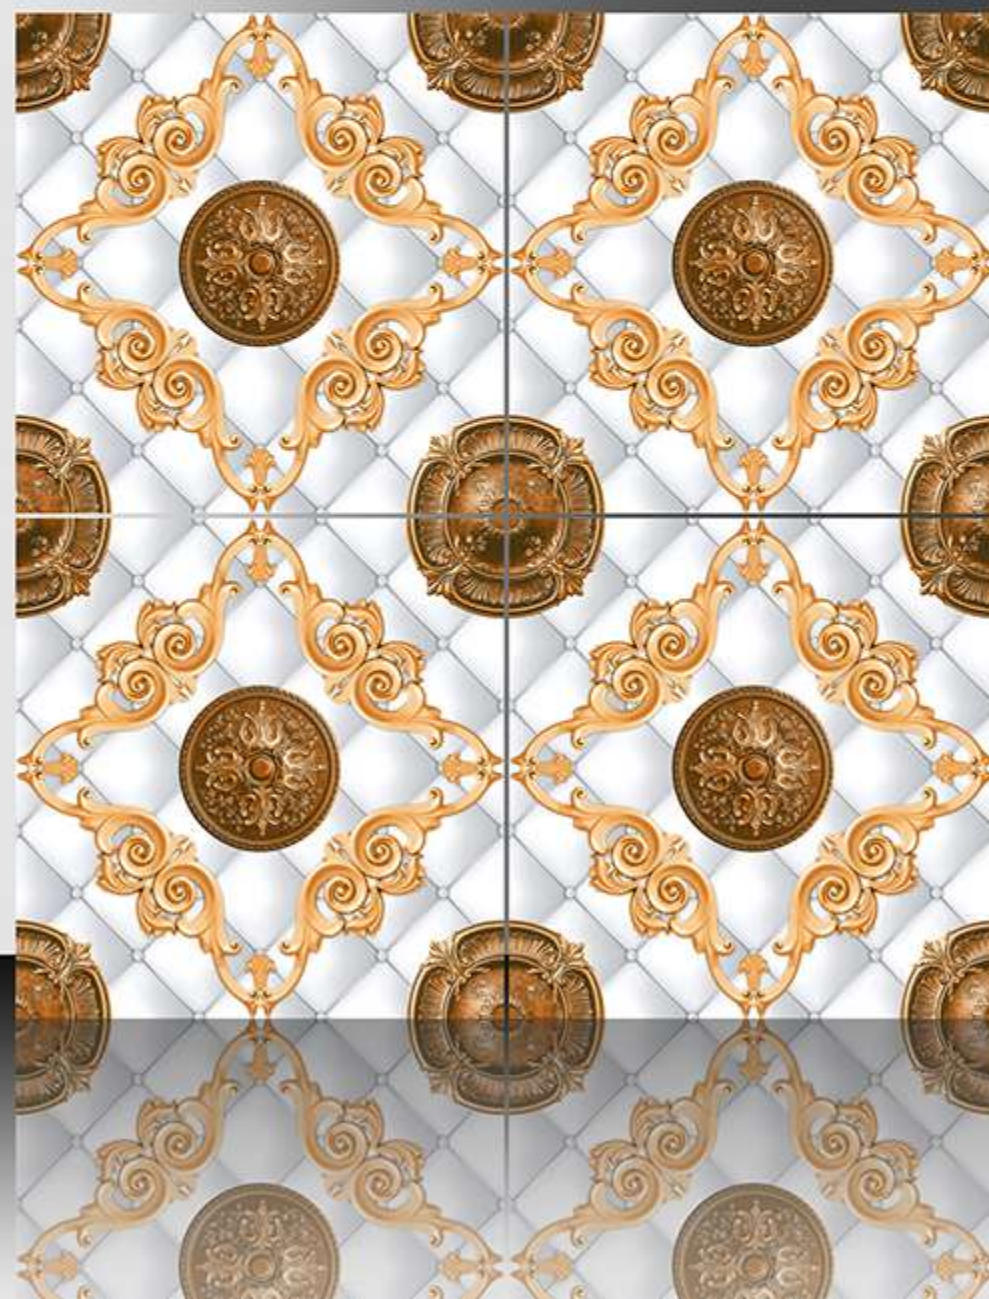

WHITE BODY

PORCELAIN TILES

600X600 mm



1208

GALICHA SERIES



WHITE BODY


PORCELAIN TILES

600X600 mm



1209

GALICHA SERIES

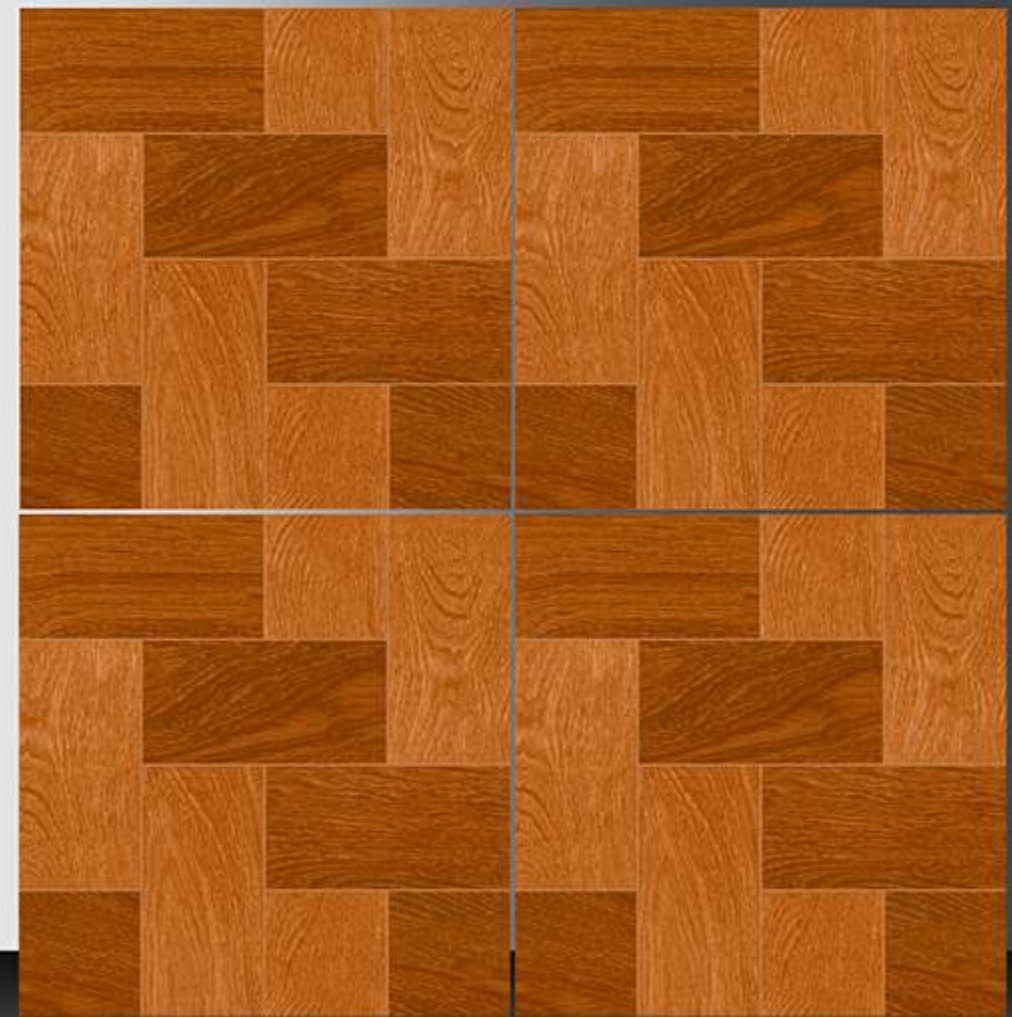

WHITE BODY

PORCELAIN TILES

600X600 mm



1212

GALICHA SERIES



WHITE BODY


PORCELAIN TILES

600X600 mm



1213


GALICHA SERIES

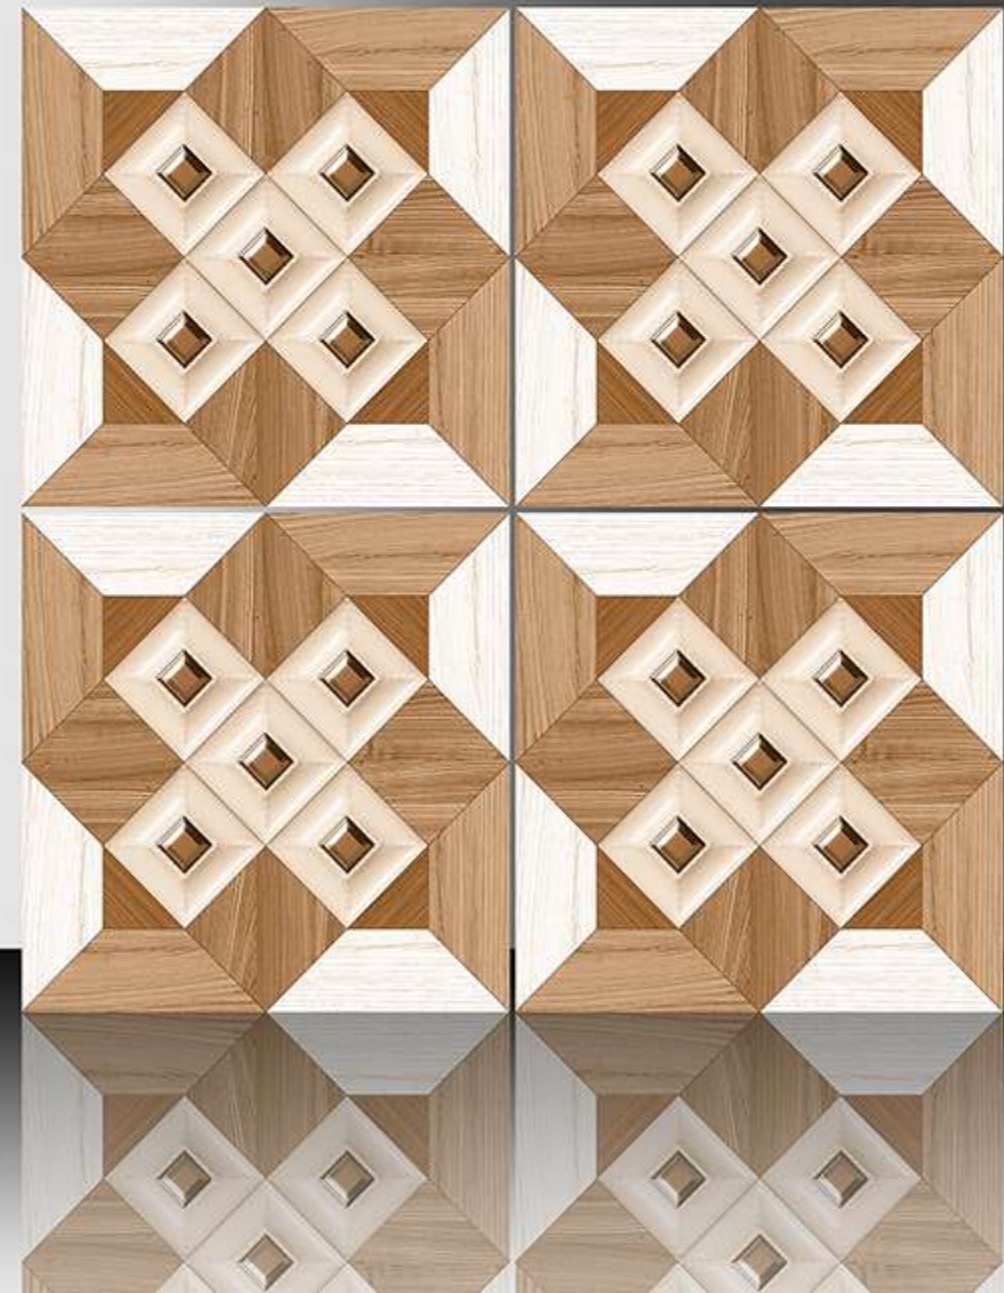

WHITE BODY

PORCELAIN TILES

600X600 mm

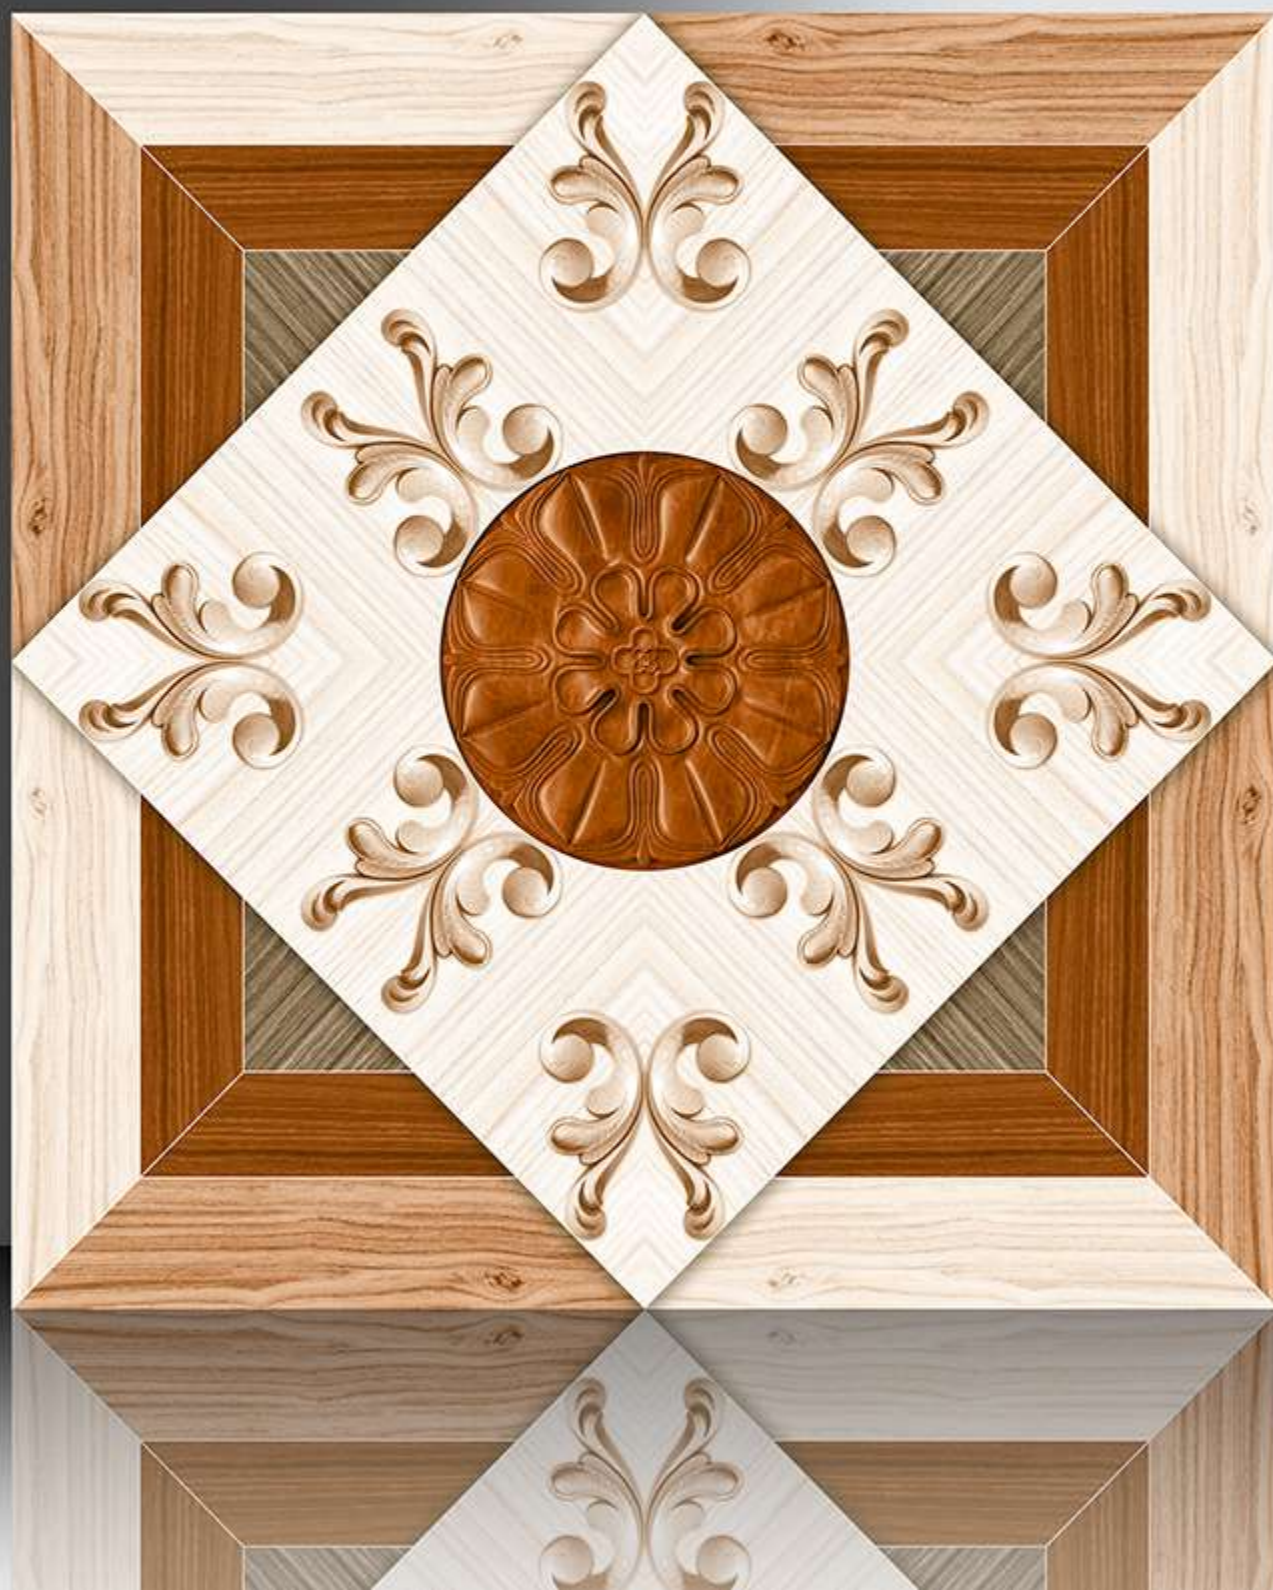

1214


GALICHA SERIES



WHITE BODY


PORCELAIN TILES

600X600 mm

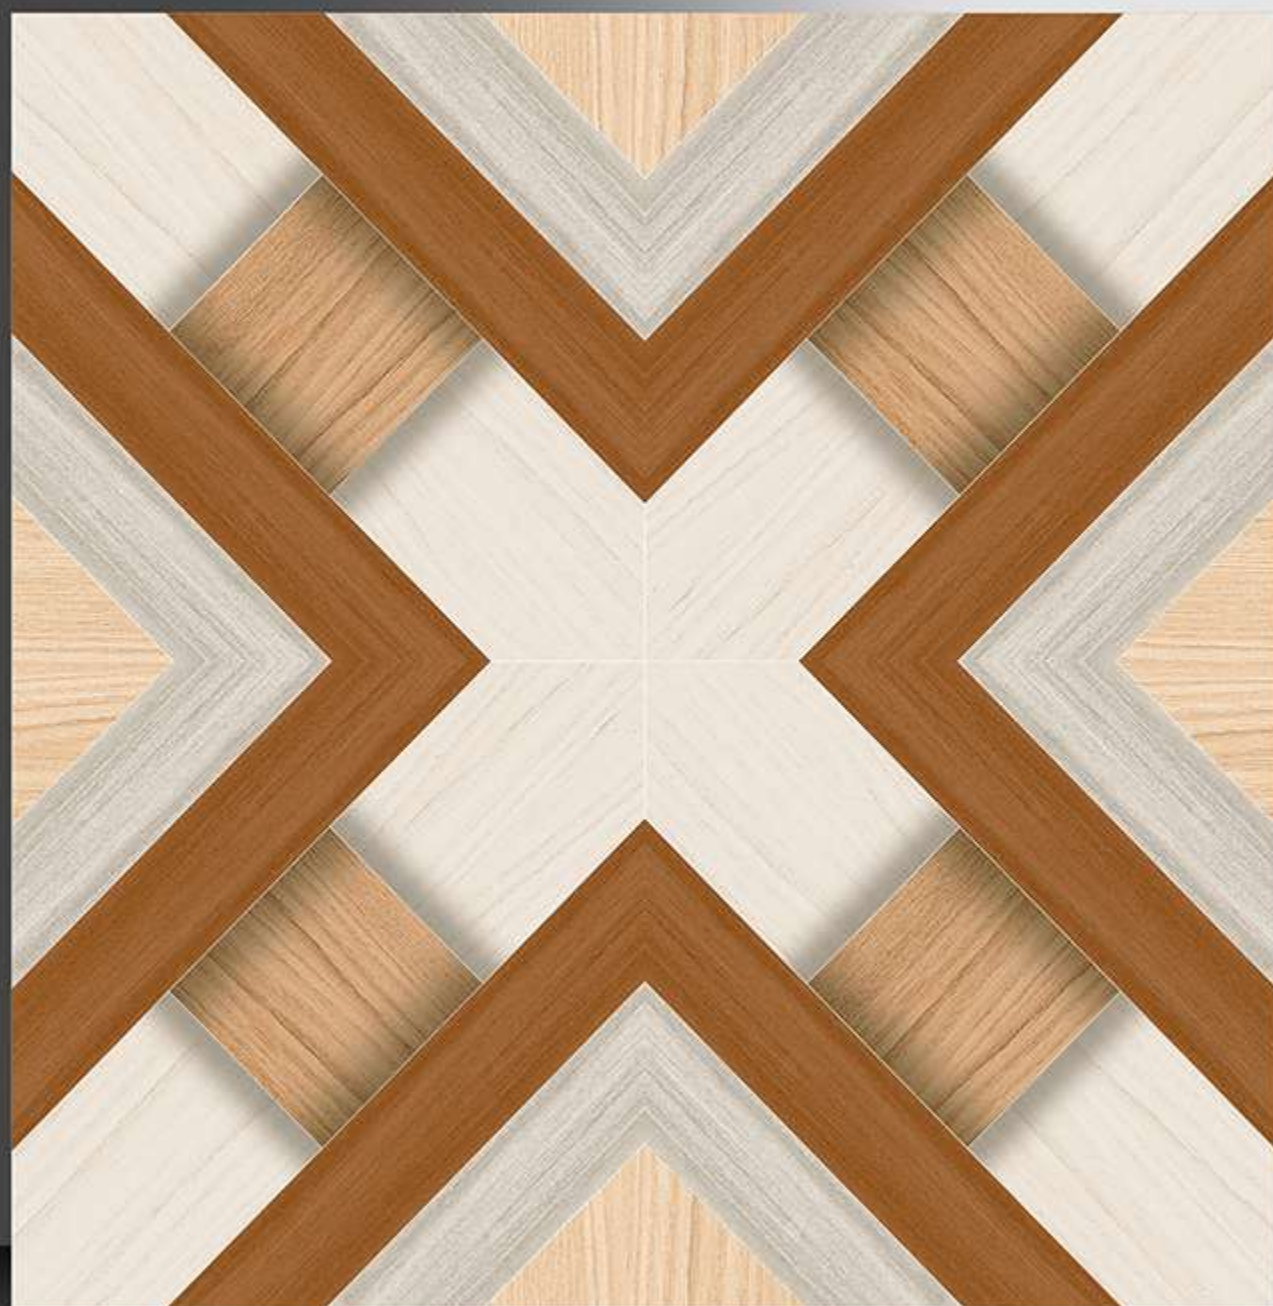


1215

GALICHA SERIES

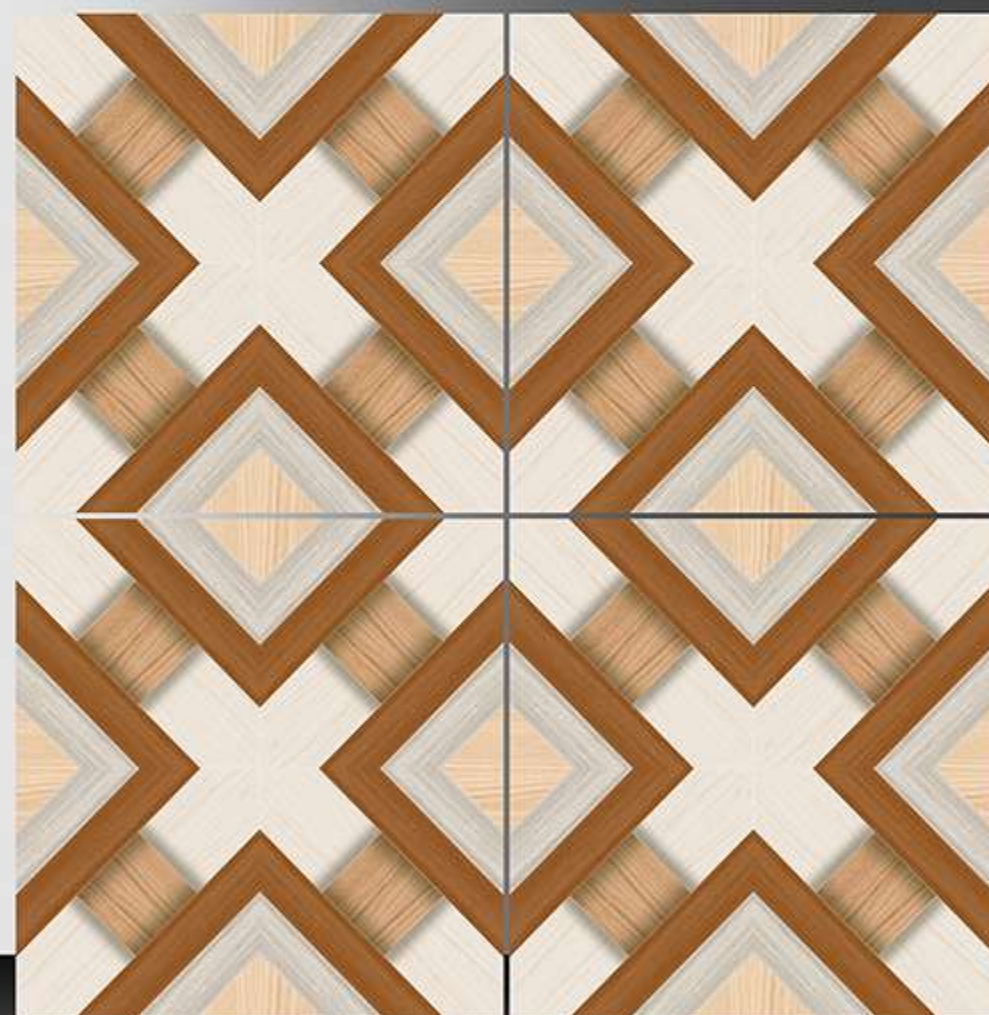


WHITE BODY

PORCELAIN TILES
600X600 mm

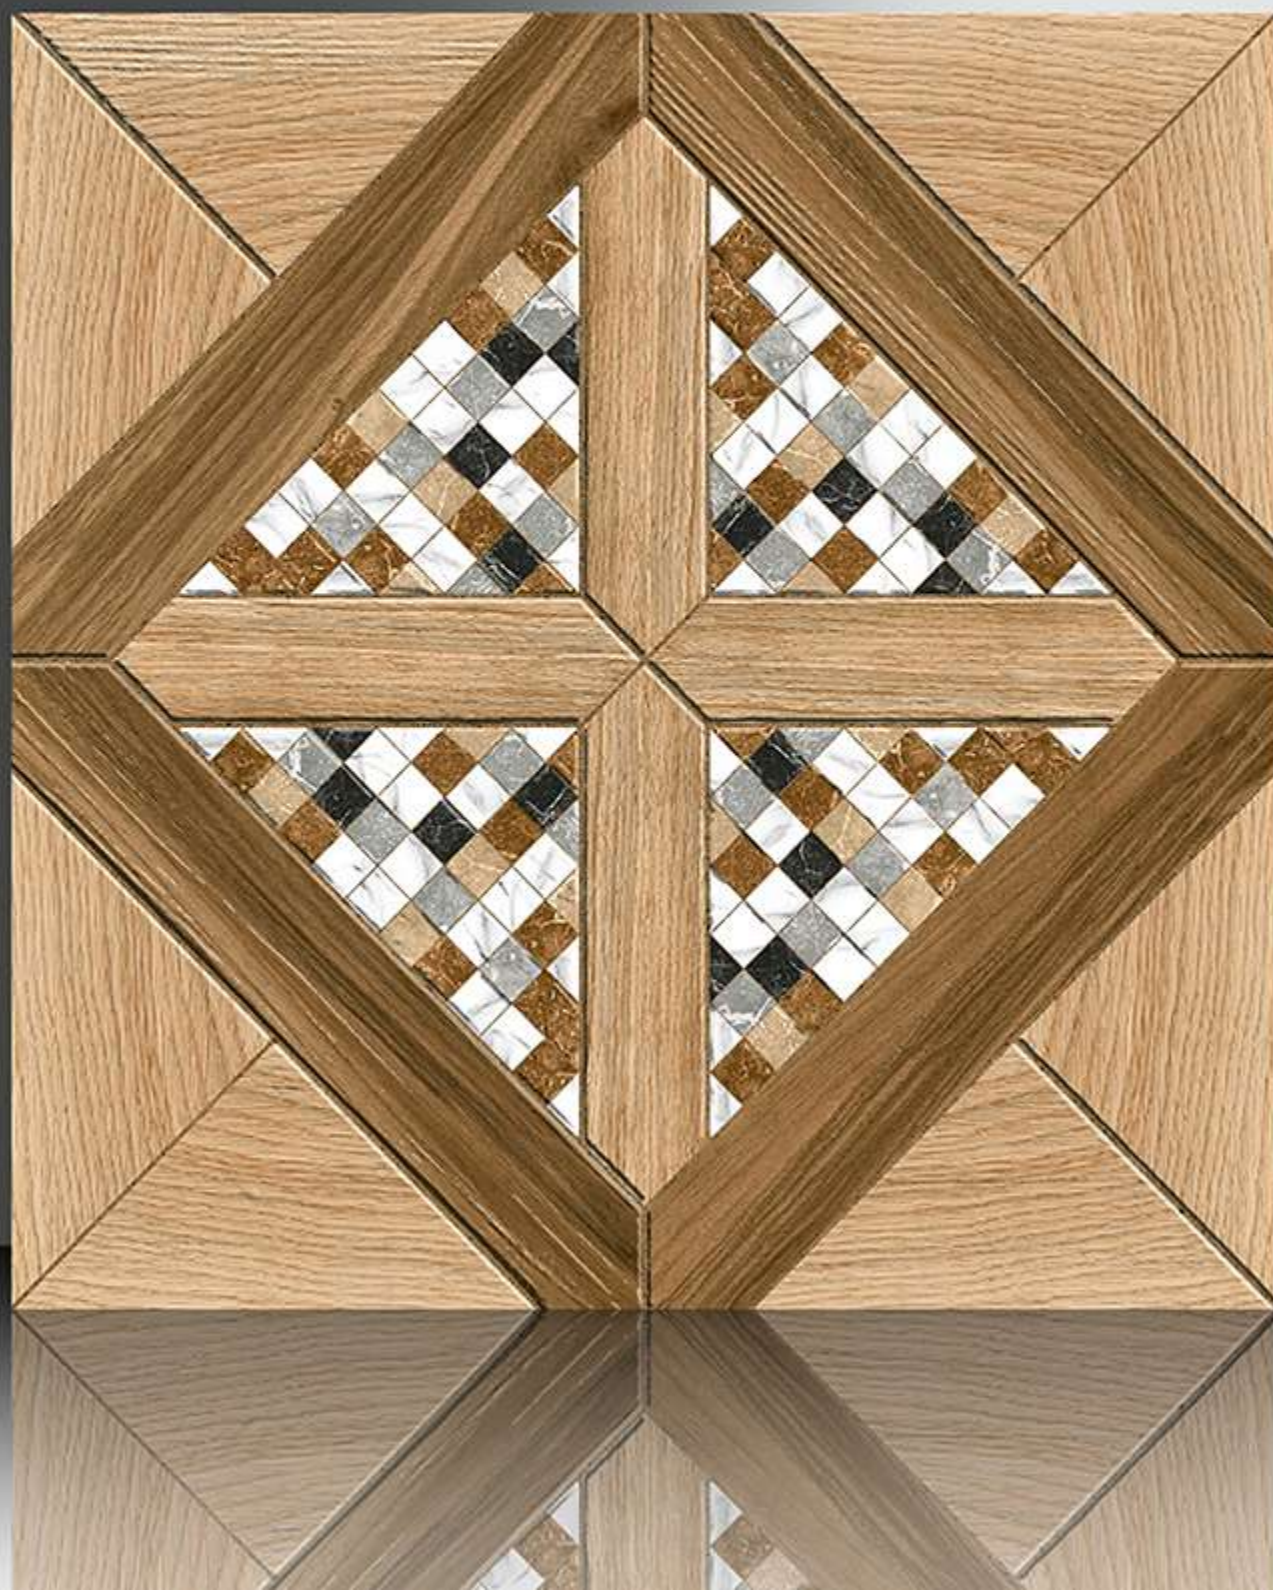

1216

GALICHA SERIES

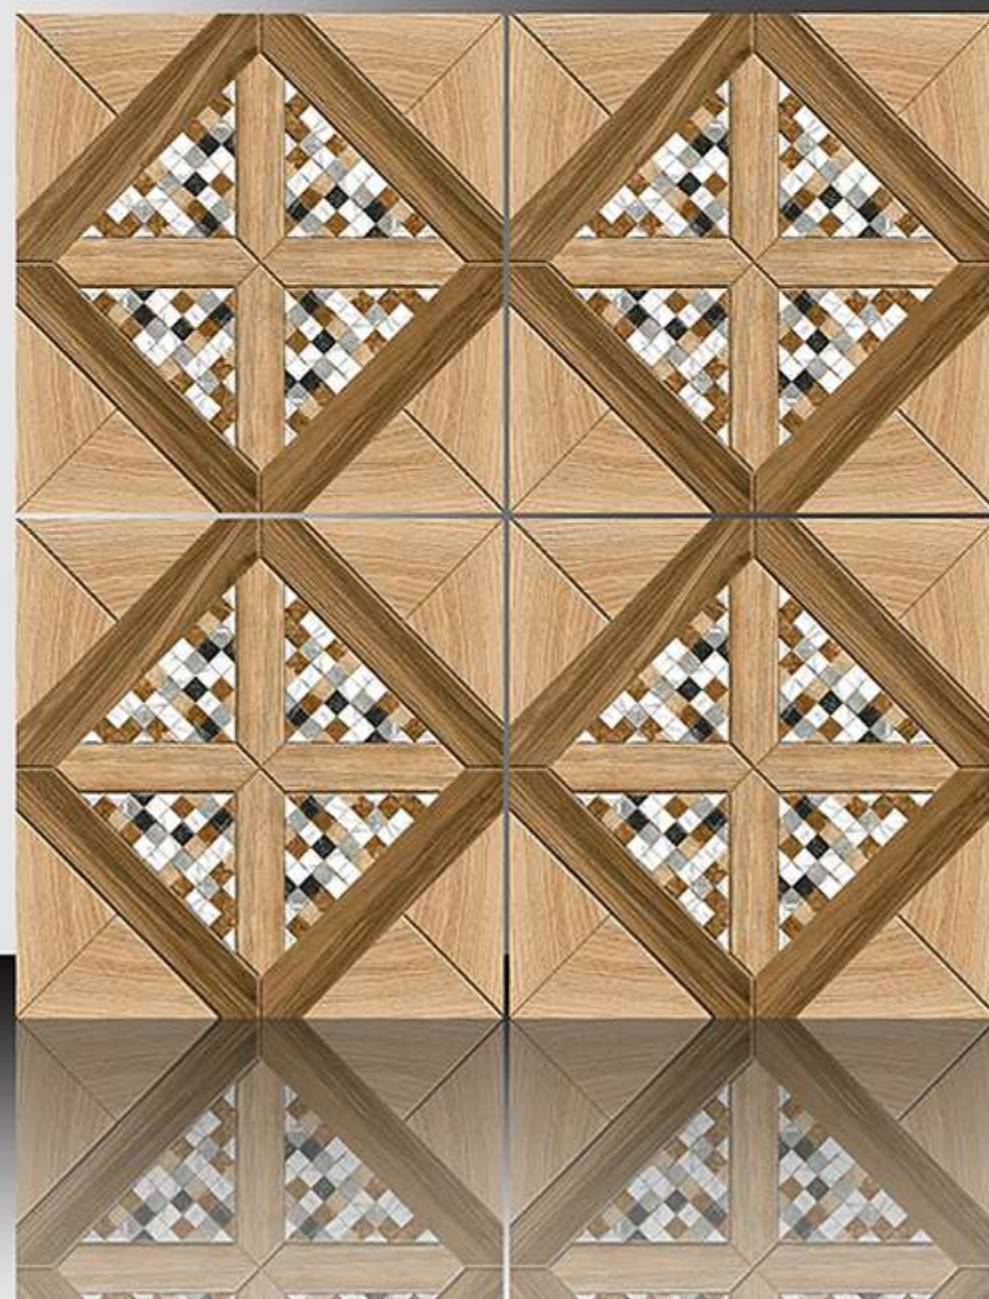

WHITE BODY

PORCELAIN TILES

600X600 mm



1217

GALICHA SERIES



WHITE BODY


PORCELAIN TILES

600X600 mm



1218

GALICHA SERIES

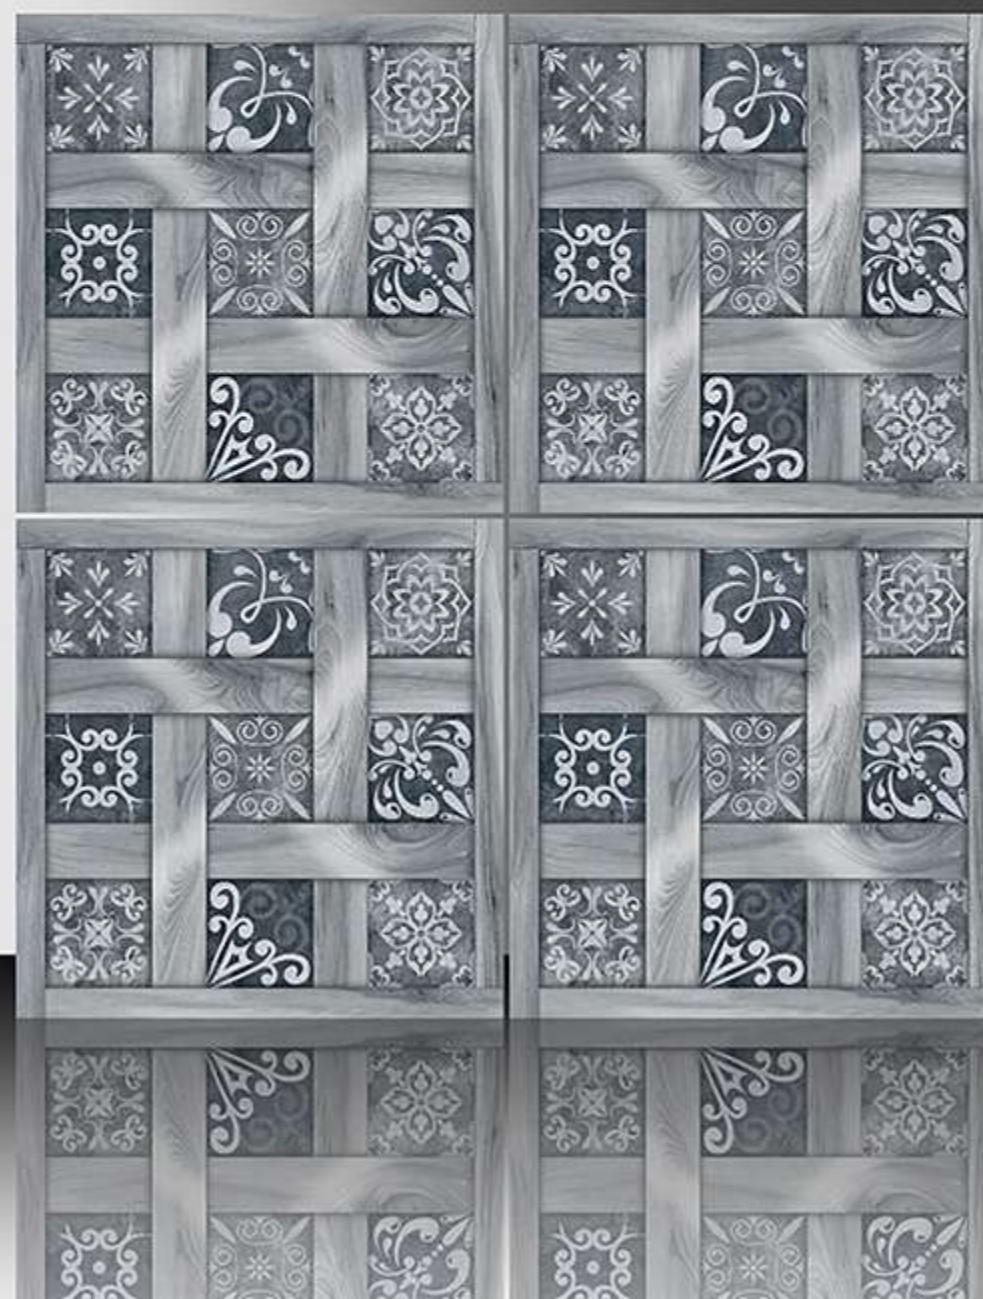

WHITE BODY


PORCELAIN TILES

600X600 mm



1219

GALICHA SERIES

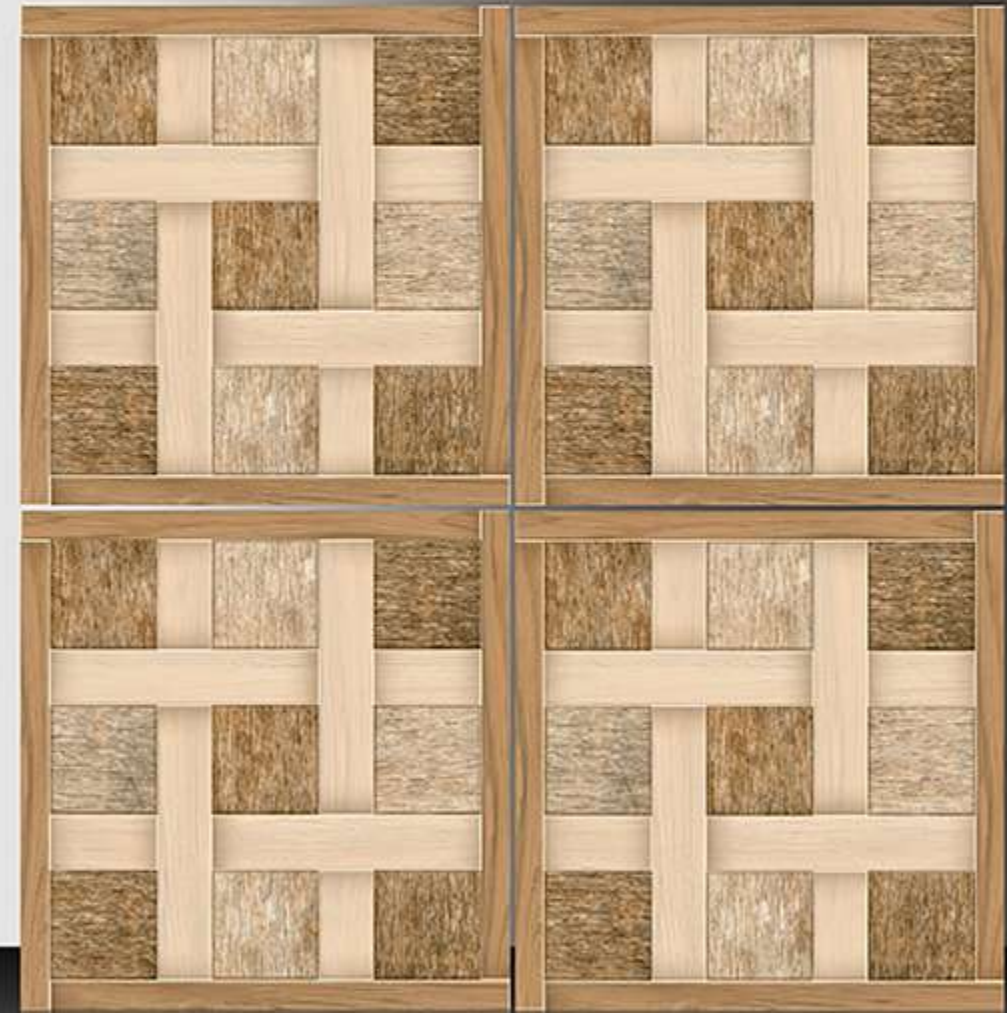

WHITE BODY

PORCELAIN TILES

600X600 mm



1220

GALICHA SERIES



WHITE BODY

PORCELAIN TILES

600X600 mm



1221

GALICHA SERIES



WHITE BODY

PORCELAIN TILES
600X600 mm



1222

GALICHA SERIES



TECHNICAL SPECIFICATION

| Particulars | Standard as per ISO 13006/EN 176 | OUR VALUE | METHOD OF TESTING |
|--------------------------|----------------------------------|--------------|--------------------|
| Deviation in length | ± 0.50% | ± 0.3% | EN 98 |
| Deviation in Thickness | ± 5% | ± 3% | EN 98 |
| Straightness Of Sides | ± 0.5% | ± 0.3% | EN 98 |
| Rectangularity | ± 0.6% | ± 0.3% | EN 98 |
| Surface Flatness | ± 0.5% | ± 0.3% | EN 98 |
| Water Absorption | < 3 | 3 < 4 | ISO 10945.3 EN 98 |
| Mohs Hardness | > 5 | > 5 | EN 101 |
| Flexural Strength | > 35 N/Sq.mm | > 39 N/Sq.mm | — |
| Abrasion Resistance | As specified by Manufacturer | PE 3 | ISO 10545.6 EN 102 |
| Frost Resistance | Frost Proof | Frost Proof | ISO 10534 - 11 |
| Chemical Resistance | No Damage | No Damage | ISO 10534 - 18 |
| Thermal Shock Resistance | No Damage | No Damage | ISO 10545 - 9 |
| Colour Resistance | No Damage | No Damage | — |
| Stain Resistance | Resistance | Stain Proof | ISO 10545 - 14 |
| Moisture Expansion | NIII | NIII | ISO 10545 - 10 |
| Crazing Resistance | Min 2 Cycle | Min 4 Cycle | — |

Note : Colour Shown are as accurate as the limitations of the printing process will allow. Prospective Customer Are advised to inspect a sample of the tiles before ordering every effort has been made to ensure the Accuracy of the information given. However, the Company reserves the right to change the specifications without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advice you to follow the fixing Instruction on the cartons of the tiles as on responsibility can be accepted by the company once the tiles have been fixed.

PACKING DETAIL

| Size | Thickness | No. of Tiles | Area Approx. | Weight Approx. |
|--------------|-----------|--------------|---------------|----------------|
| 600 X 600 MM | 9 MM | 4 Pcs. | 1.44 Sq. Mtr. | 25.5 Kg. |

UTILITY OF FLOOR TILES

